


## 101F Vacuum Tube

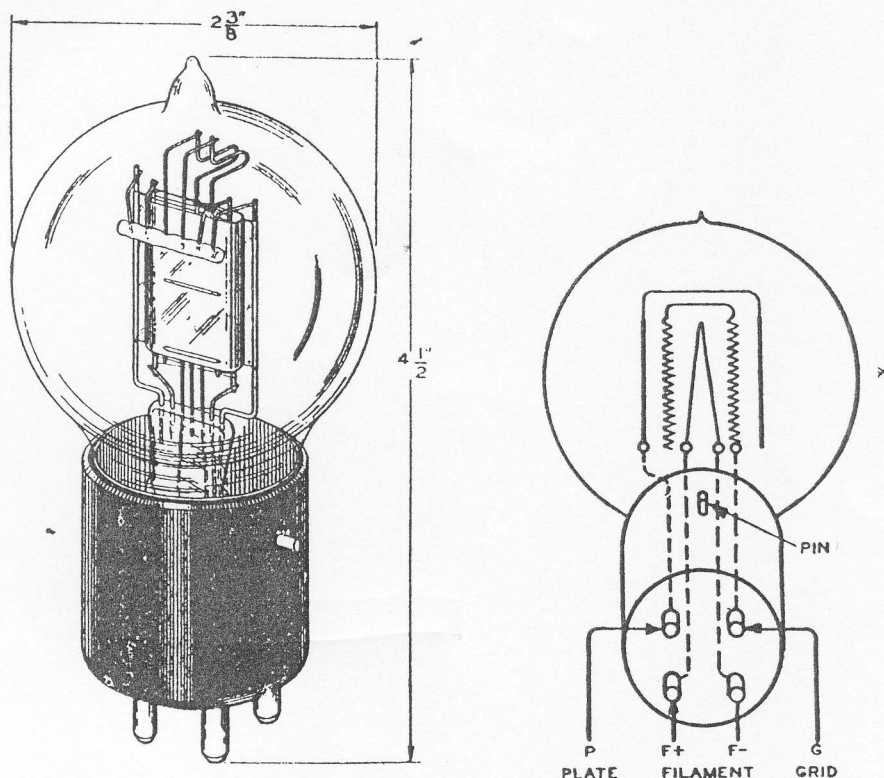

### Classification

The No. 101F Vacuum Tube is a three-element filamentary type tube for use where small amounts of output power are required.

### Base and Socket

The No. 101F Vacuum Tube employs a four-prong bayonet pin type base suitable for use in a Western Electric No. 100L (front panel mounting), No. 100R (rear panel mounting), or similar type socket.

### Rating and Characteristic Data

Filament Current.....				.50 Ampere
Filament Voltage.....				4.1 Volts
Plate Voltage.....	130	130	160	190 Max.
Grid Voltage.....	-8	-8	-12	-16
Average Plate Current—Milliamperes.....	6.0	6.0	6.7	7.5
Average Amplification Factor.....	6.5	6.5	6.5	6.5
Average Plate Resistance—Ohms.....	5900	5900	5600	5400
*Average Power Output—Milliwatts.....	60	55	135	240
Second Harmonic—% of Fundamental.....	5	2	3	4
Third Harmonic—% of Fundamental.....	0.5	0.2	0.3	0.5
Load Resistance—Ohms.....	5900	11800	11200	10800


\*Input in peak values is equal to grid voltage.

### Approximate Direct Interelectrode Capacities (measured without socket)

Plate to Grid.....	5.9 MMF
Plate to Filament.....	3.7 MMF
Grid to Filament.....	5.2 MMF

### Average Static Characteristics

The accompanying curves give the average static characteristics of the No. 101F Vacuum Tube.

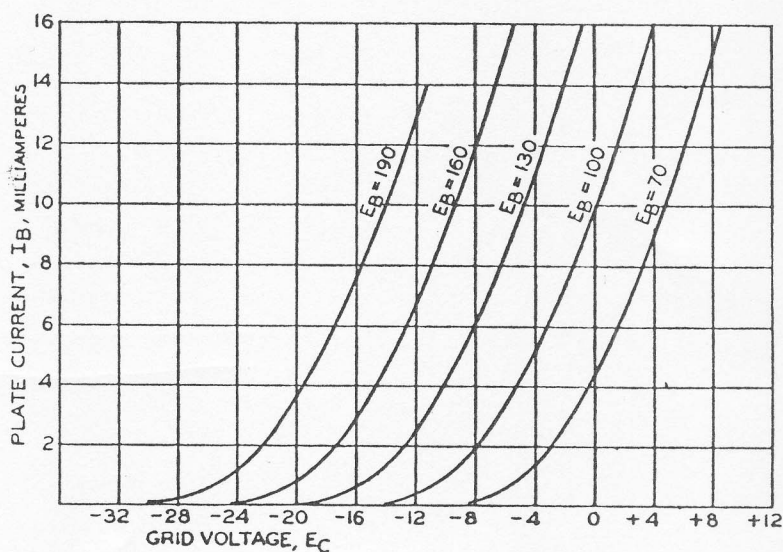

### General Features

The No. 101F Vacuum Tube was designed for use where a very long life is essential. This makes it particularly suitable for applications where continuous service is desired. The microphonic response of this tube is low.

The electrical characteristics are such that moderate power outputs are obtainable with small plate currents and with plate voltage under 200 volts.

The characteristics are similar to those of the No. 101D, however, the No. 101F operates at a filament current of 0.5 instead of 1.0 ampere.

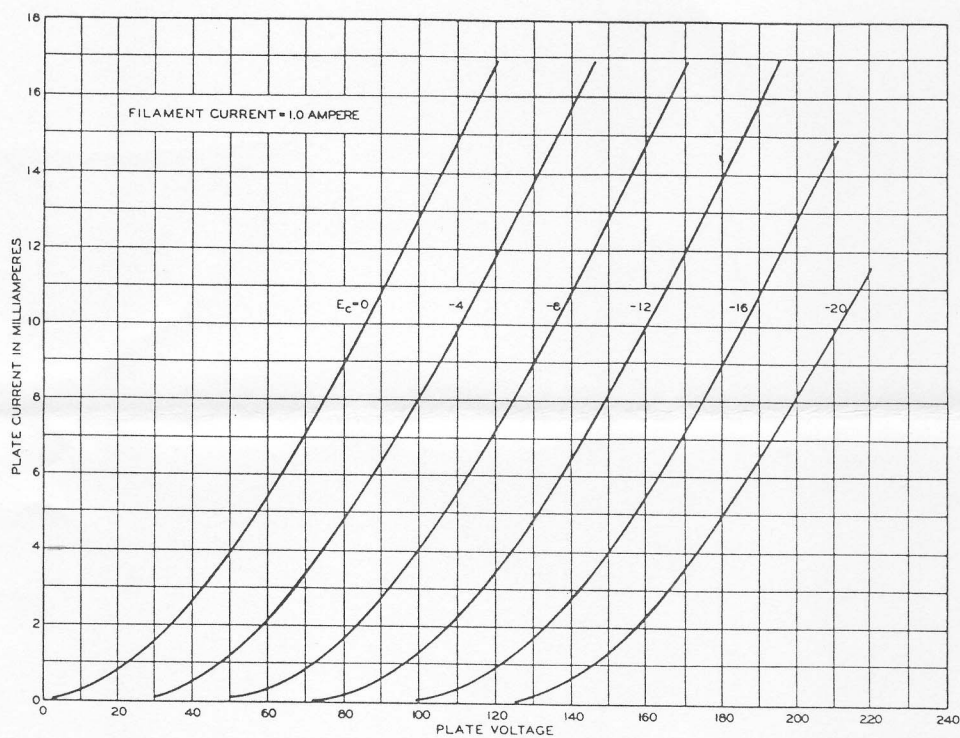


FIG. 7

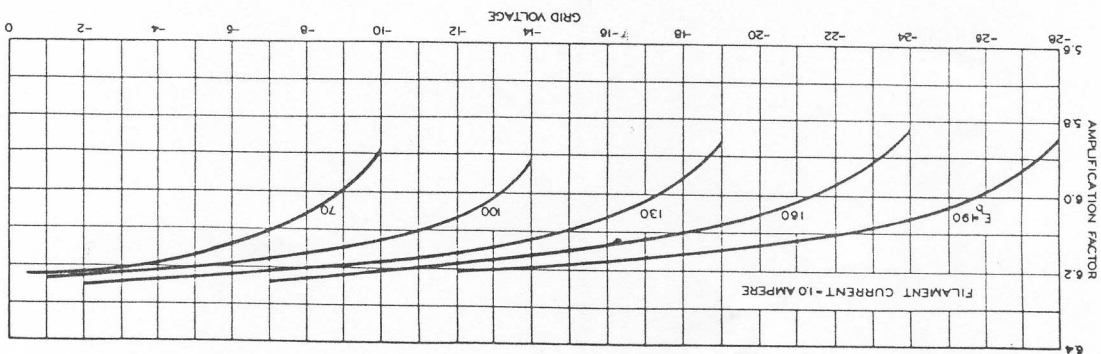


FIG. 4

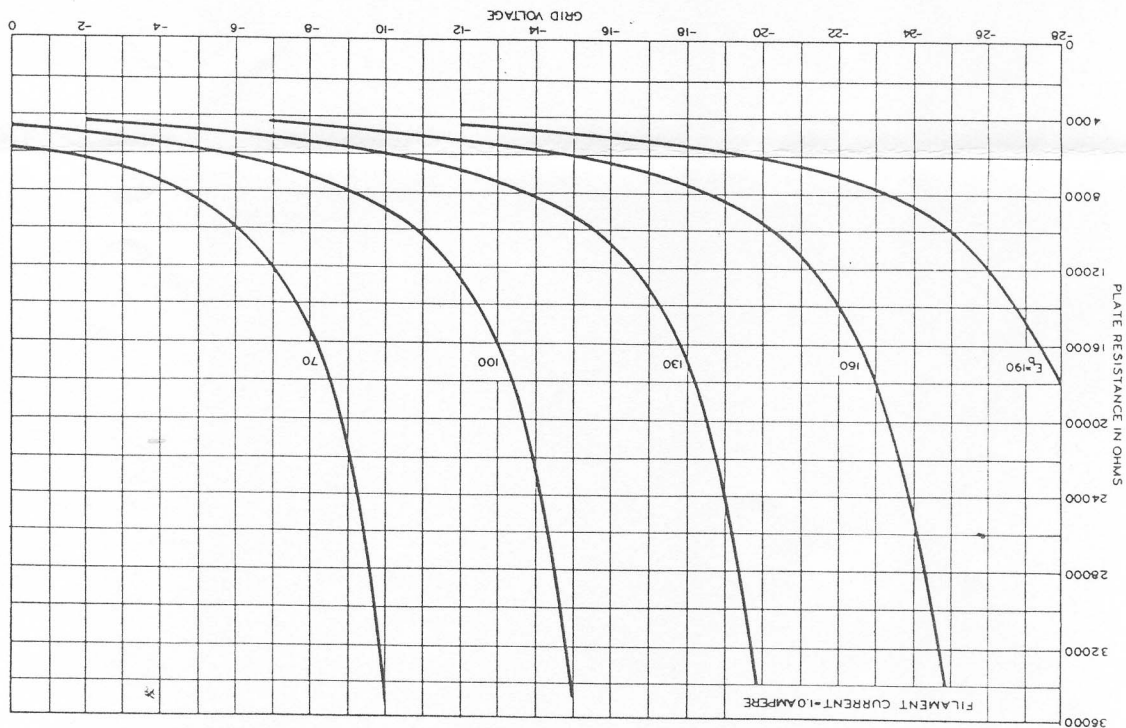


FIG. 5

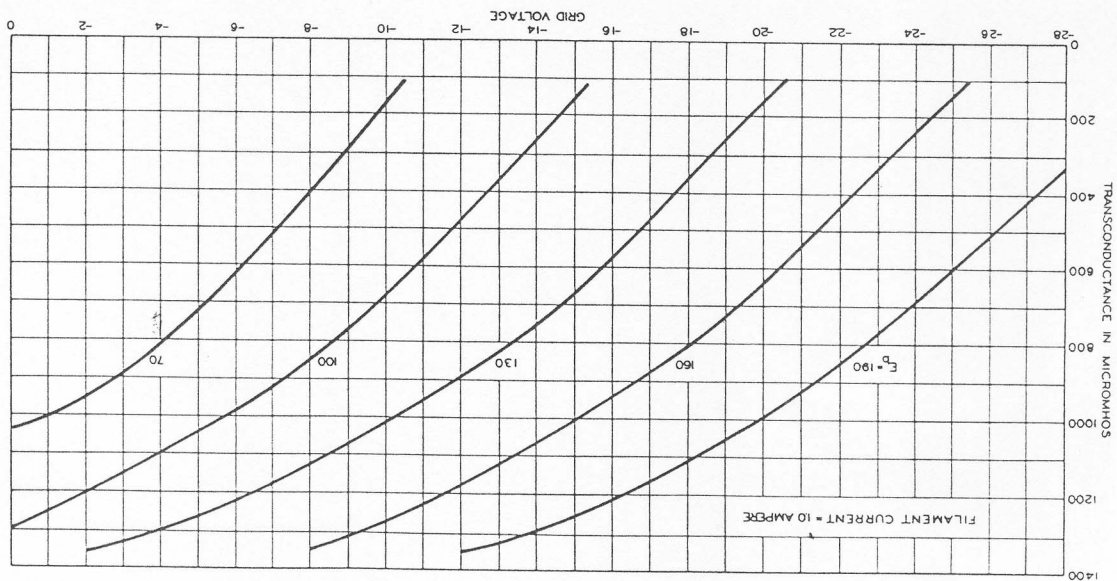


FIG. 6



# *Western Electric*

## 101D Vacuum Tube (Dome)



### **Classification—Low-Power, Filamentary Triode**

This tube replaces the D-86326 tube and has been assigned the old code number 101D. It includes an improved filament, a new mechanical design using transverse mica supports and is mounted in a dome type bulb. The electrical characteristics are essentially the same as for the D-86326 tube.

**Applications—**Voice frequency and carrier-frequency amplifier for telephone repeater equipment and other applications where small power outputs are required.




Modulator and demodulator in carrier-systems.

Oscillator in voice and carrier frequency applications.

**Dimensions and Connections—**Figures 1 and 2 show the outline diagrams of the tube and base, giving the dimensions and the arrangement of the electrode connections to the base terminals.

**Base and Mounting—**This vacuum tube employs a medium, four-pin bayonet type base having special contact metal at the ends of the pins. It is suitable for use in a Western Electric 100L, 100R, or similar type socket, preferably provided with contact-metal contacts.

The tube may be mounted in either a vertical or horizontal position. If mounted in a horizontal position the plane of the filament, which is indicated in Figure 2, should be vertical. To assure adequate ventilation the tubes should be mounted with not less than  $2\frac{5}{8}$  inches between centers when two or more tubes are used.

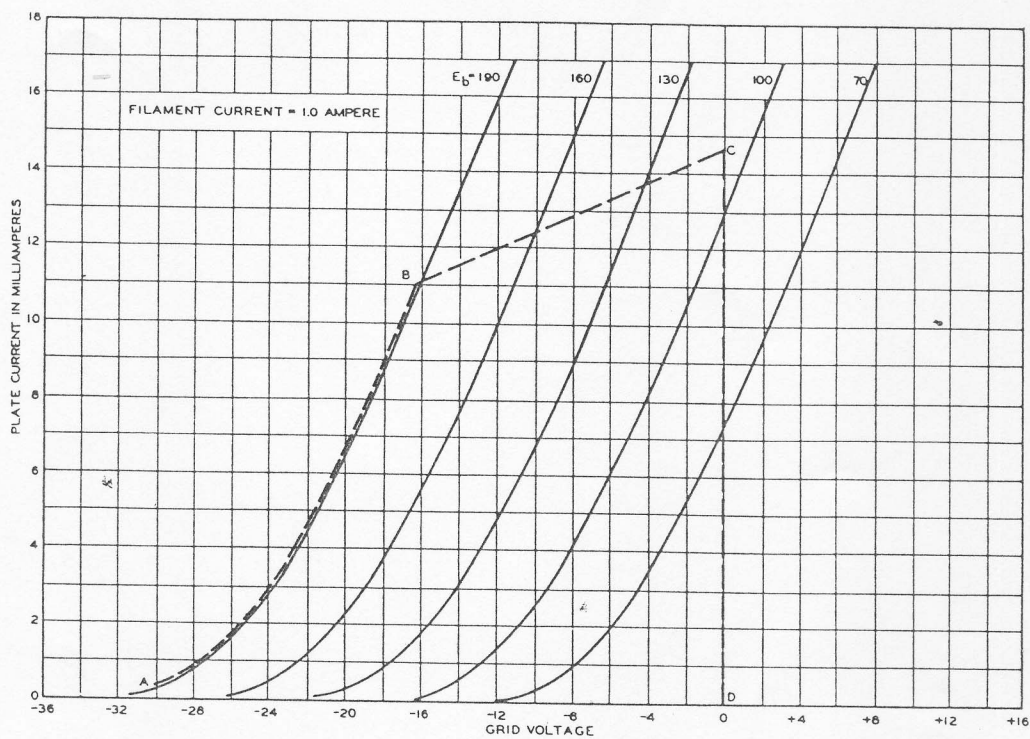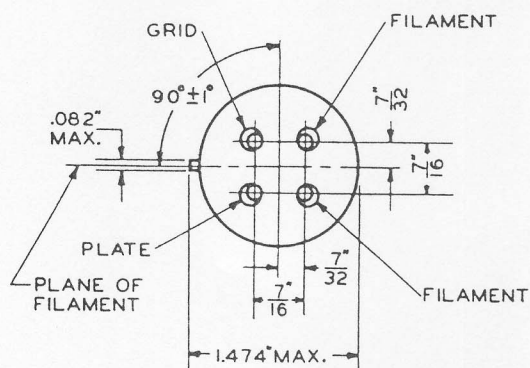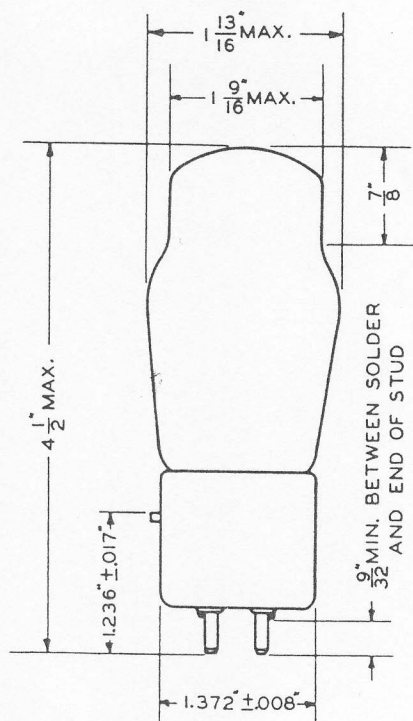

TABLE

	<u>Plate VOLT- age</u> Volts	<u>Grid Bias</u> Volts	<u>Plate Cur- rent</u> Milli- amperes	<u>Ampli- fication Factor</u>	<u>Plate Resist- ance</u> Ohms	<u>Trans- conduct- ance</u> Micro- mhos	<u>Load Resist- ance</u> Ohms	<u>Power Out- put</u> Milli- watts	<u>Second Har- monic</u> db	<u>Third Har- monic</u> db
Recom- mended Operat- ing Condi- tions	100	-4	8.1	6.2	5700	1090	5700 12000	14 12	38 45	61 73
	130	-12	4.7	6.2	6800	900	6800 12000	91 89	22 28	35 44
	130	-9	7.7	6.2	5800	1070	5800 12000	65 58	31 37	48 57
	130	-6	11.2	6.2	5100	1220	5100 12000	34 29	38 45	60 68
	160	-16	5.6	6.1	6500	940	6500 12000	172 161	20 27	32 40
	160	-12	9.9	6.2	5300	1170	5300 12000	121 108	29 37	46 56
Maximum Operat- ing Condi- tions	160	-10	12.5	6.2	4900	1270	4900 12000	93 79	33 41	53 64
	190	-20	6.4	6.1	6200	990	6200 12000	263 250	19 26	30 37
	190	-18	8.7	6.2	5600	1100	5600 12000	248 224	23 31	35 46
	190	-16	11.0	6.2	5100	1210	5100 12000	223 187	26 35	42 54

### Average Direct Interelectrode Capacitances

Grid to Plate.....	6.4 $\mu\mu\text{f}$
Grid to Filament.....	4.4 $\mu\mu\text{f}$
Plate to Filament.....	2.9 $\mu\mu\text{f}$

These values are for a based tube without socket.

### Filament Rating

Filament Current.....	1.0 ampere, d.c.
Nominal filament voltage.....	4.5 volts

The filament of this tube is designed to operate on a current basis and should be operated at as near the rated current as practicable.

The filament resistance of this tube increases slightly during the first 2000 hours of operation. The voltage given above is the nominal value after this resistance change has stabilized.

**Characteristics**—Figure 3 shows typical curves of plate current as a function of grid voltage for several values of plate voltage. The grid and plate voltages are measured from the negative end of the filament. Figures 4, 5 and 6 show corresponding amplification factor, plate resistance and transconductance characteristics respectively. Figure 7 shows plate current as a function of plate voltage for several values of grid voltage.

**Operating Conditions and Output**—Figure 3 shows the range of permissible operating plate and grid voltages included within the area ABCD. A number of recommended and maximum operating conditions and the corresponding values of amplification factor, plate resistance, transconductance and performance data are given in the table.

Recommended conditions or others of no greater severity should be selected in preference to maximum conditions wherever possible. The life of the tube at maximum operating conditions will be shorter than at less severe conditions.

The performance data shown include the fundamental power output in milliwatts and the second and third harmonic levels in db below the fundamental for values of load resistance equal to the plate resistance and for a load resistance of 12000 ohms. The peak value of the sinusoidal input voltage  $E_{gm}$ , which gives the indicated output  $P_m$ , and harmonic levels  $F_{2m}$ , and  $F_{3m}$ , in each case is numerically equal to the grid bias. For a smaller input voltage  $E_g$ , the approximate levels may be computed from the following relations:

$$P = P_m \left( \frac{E_g}{E_{gm}} \right)^2$$

$$F_2 = F_{2m} + 20 \log_{10} \frac{E_{gm}}{E_g}$$

$$F_3 = F_{3m} + 40 \log_{10} \frac{E_{gm}}{E_g}$$

### Microphonic Noise

For a plate voltage of 130 volts, a grid bias of  $-9$  volts, and a load resistance of 100,000 ohms, the mean microphonic output level of this tube, measured in a laboratory reference test set is 32 db below 1 volt. The range of levels of individual tubes extends from 20 to 40 db below 1 volt. Since microphonic noise output depends on the type and intensity of the mechanical disturbance which produces it, the values given here are useful chiefly for comparison with the levels of other types of tubes which have been tested in the same way.