


High vacuum FULL-WAVE RECTIFYING VALVE
 TUBE REDRESSEUR BIPLAQUE à vide poussé
 Hochvakuum VOLLWEGGLEICHRICHTERRÖHRE

Heating: direct by A.C.
 Chauffage: direct par C.A.
 Heizung: direkt durch Wechselstrom

$V_f = 4,0 \text{ V}$
 $I_f = 1,1 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm

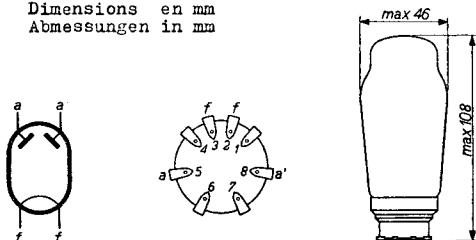



Base, culot, Fuss: P

Operating characteristics and limiting values
 Caractéristiques d'utilisation et limites
 Betriebs- und Grenzdaten

V_{tr}	=	2x300	2x400	max. 2x500	V_{eff}
I_o	=	max. 100	max. 75	max. 60	mA
C_{filt}	=	max. 60	max. 60	max. 60	μF
R_t	=	min. 2x60	min. 2x80	min. 2x100	Ω

AZ 1

PHILIPS

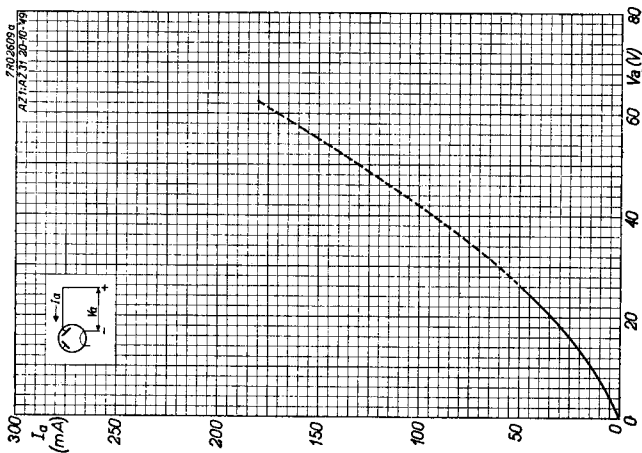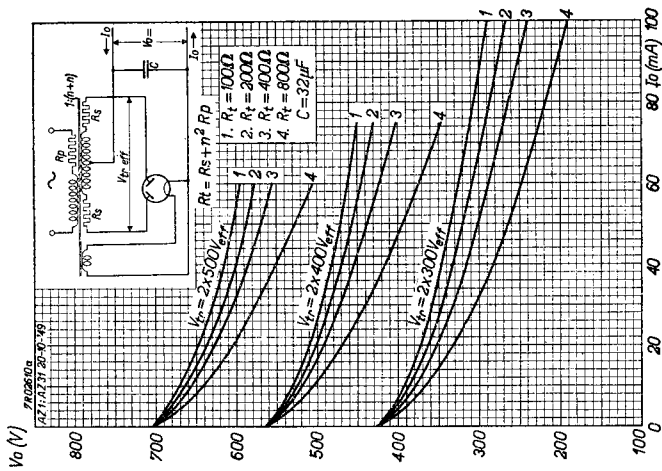

A

PHILIPS



*Electronic
Tube*

HANDBOOK

	AZ1	
page	sheet	date
1	1	1953.06.06
2	A	1953.06.06
3	FP	1999.06.26