



ECC832



12DW7

COMBINATED DOUBLE TRIODE FOR SPECIAL PURPOSES

DIMENSION AND CONNECTIONS:



Base: NOVAL

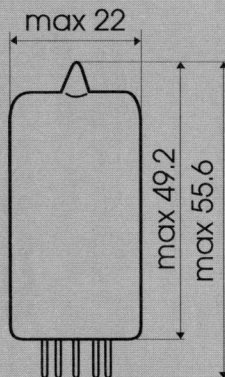

$U_f = 6,3$ or $12,6$ V

$I_f = 300$ mA or 150 mA

TYPICAL CHARACTERISTIC:

System I.
(pin 6, 7, 8)

$U_a = 250$ V

$U_g = -2$ V

$I_a = 1,2$ mA

$S = 1,6$ mA/V

$R_i = 62,5$ k Ω

$\mu = 100$

System II.
(pin 1, 2, 3)

$U_a = 250$ V

$U_g = -8,5$ V

$I_a = 10,5$ mA

$S = 2,2$ mA/V

$R_i = 7,7$ k Ω

$\mu = 17$


LIMITING VALUES: CAPACITANCES:

PLEASE, REFER TO SPECS. OF
ECC 83 (for system I) OR
ECC 82 (for system II)

NOTE:

Possibility to supply this tube „on request“ of customer with reverse pin order pin # 1, 2, 3 - ECC 83, pin # 6, 7, 8 - ECC 82. There is not international equivalent of this tube. In JJ catalogues is under ECC 823.

TRANSFER CHARACTERISTICS

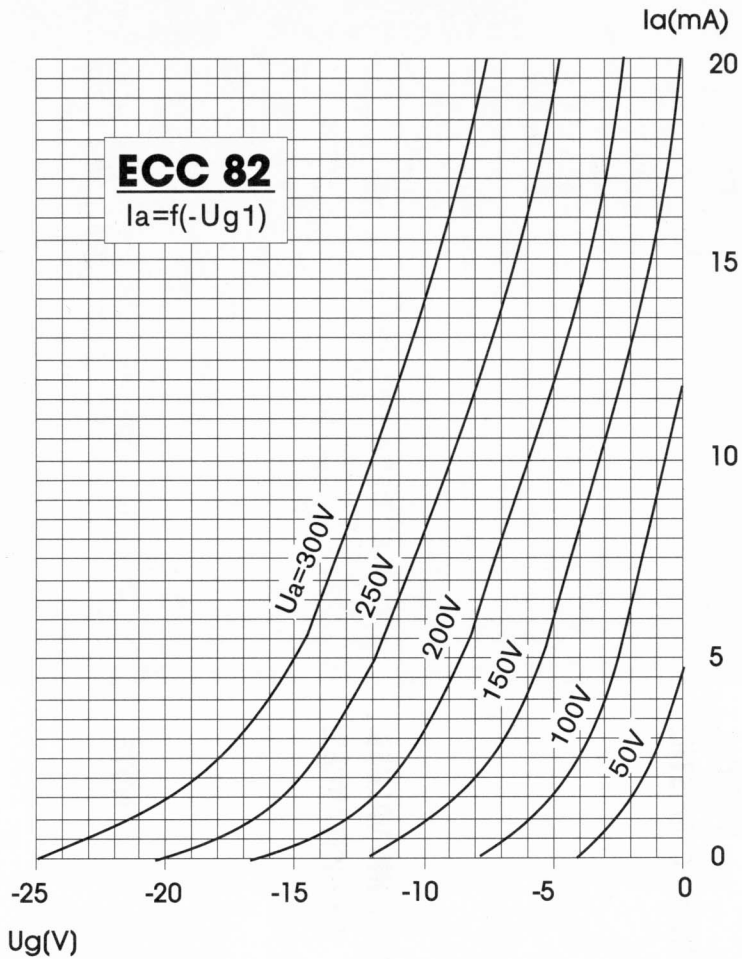

TRANSFER CHARACTERISTICS

